

- ▶ Industrial design
- ▶ Width 22.5mm
- ▶ 16 functions
- ▶ 16 time ranges
- ▶ Zoom voltage
- ▶ 2 change over contacts



▶ Technical data

▶ 1. Functions

1 delayed contact (terminals 15-16-18) and
1 instantaneous contact (terminals 25-26-28)

E11 ON delay
R11 OFF delay with control contact
Ws11 Single shot leading edge with control contact
Wa11 Single shot trailing edge with control contact
Es11 ON delay with control contact
Wu11 Single shot leading edge voltage controlled
Bp11 Flasher pause first
Wt11 Pulse detection

2 delayed contacts

E20 ON delay
R20 OFF delay with control contact
Ws20 Single shot leading edge with control contact
Wa20 Single shot trailing edge with control contact
Es20 ON delay with control contact
Wu20 Single shot leading edge voltage controlled
Bp20 Flasher pause first
Wt20 Pulse detection

▶ 2. Time ranges

Time range	Adjustment range	
1s	50ms	1s
3s	150ms	3s
10s	500ms	10s
30s	1500ms	30s
1min	3s	1min
3min	9s	3min
10min	30s	10min
30min	90s	30min
1h	3min	1h
3h	9min	3h
10h	30min	10h
30h	90min	30h
1d	72min	1d
3d	216min	3d
10d	12h	10d
30d	36h	30d

▶ 3. Indicators

Green LED ON: indication of supply voltage
Green LED flashes: indication of time period
Yellow LED ON/OFF: indication of relay output

▶ 4. Mechanical design

Self-extinguishing plastic housing, IP rating IP40
Mounted on DIN-Rail TS 35 according to EN 50022
Mounting position: any
Shockproof terminal connection according to VBG 4 (PZ1 required), IP rating IP20
Initial torque: max. 1Nm
Terminal capacity:
1 x 0.5 to 2.5mm² with/without multicore cable end
1 x 4mm² without multicore cable end
2 x 0.5 to 1.5mm² with/without multicore cable end
2 x 2.5mm² flexible without multicore cable end

▶ 5. Input circuit

Supply voltage: 12 to 240V AC/DC terminals A1(+)-A2
Tolerance: ±10% (> -5°C)
-15% to +10% (< -5°C)
48 to 63Hz

Rated frequency:
Rated consumption:
24V AC/DC 1.5VA (1W)
110V AC 4VA (1.4W)
230V AC 11VA (2.1W)

Duration of operation: 100%
Reset time: 100ms
Residual ripple for DC: 10%
Drop-out voltage: >30% of the supply voltage

▶ 6. Output circuit

2 potential free change over contacts
Switching capacity (distance < 5mm): 1250VA (5A / 250V AC)
Switching capacity (distance > 5mm): 2000VA (8A / 250V AC)
Fusing: 8A fast acting
Mechanical life: 20 x 10⁵ operations
Electrical Life: 2 x 10⁵ operations
at 1000VA resistive load
Switching frequency: max. 60/min at 100VA resistive load
max. 6/min at 1000VA resistive load
(according to IEC 947-5-1)

Insulation voltage: 250V AC (according to IEC 664-1)
Surge voltage: 4kV, overvoltage category III
(according to IEC 664-1)

▶ 7. Control contact

Connections: not potential free, terminals A1-B1
Loadable: yes, parallel load min.1VA (0.5W)
terminals A2-B1
Line length: max. 10m
Control pulse length: DC min. 70ms
AC min. 70ms

▶ 8. Accuracy


Base accuracy: ±1% (of maximum scale value)
Adjustment accuracy: ≤6% (of maximum scale value)
Repetition accuracy: ±1% or ±10ms
Voltage influence: -
Temperature influence: ≤0.05% / °C

▶ 9. Ambient conditions

Ambient temperature: -25 to +55°C (according to IEC 68-1)
-25 to +40°C (according to UL 508)
Storage temperature: -25 to +70°C
Transport temperature: -25 to +70°C
Relative humidity: 15% to 85%
(according to IEC 721-3-3 class 3K3)
Pollution degree: 3 (according to IEC 664-1)

Technical data

10. Dimensions

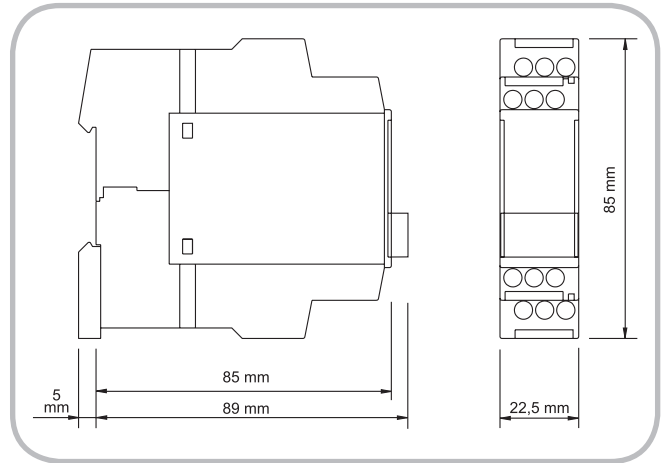


Functions

ON delay (E11)

When the supply voltage U is applied, the instantaneous contact switches into on-position and the set interval t begins (green LED flashes). After the interval t has expired (green LED illuminated) the delayed contact switches into on-position (yellow LED illuminated). This status remains until the supply voltage is interrupted.

If the supply voltage is interrupted before the expiry of the interval t , the interval already expired is erased and is restarted when the supply voltage is next applied.

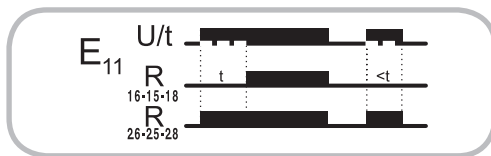


OFF delay with control contact (R11)

The supply voltage U must be constantly applied to the device (green LED illuminated).

When the control contact S is closed, both contacts switch into on-position (yellow LED illuminated). If the control contact is opened, the instantaneous contact switches into off-position and the set interval t begins (green LED flashes). After the interval t has expired (green LED illuminated) the delayed contact switches into off-position (yellow LED not illuminated).

If the control contact is closed again before the interval t has expired, the interval already expired is erased and is restarted with the next cycle.

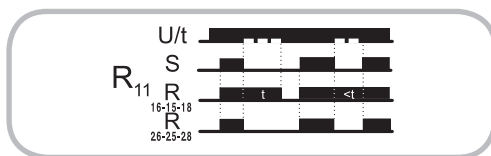


Single shot leading edge with control contact (Ws11)

The supply voltage U must be constantly applied to the device (green LED illuminated).

When the control contact S is closed, both contacts switch into on-position (yellow LED illuminated) and the set interval t begins (green LED flashes). After the interval t has expired (green LED illuminated) the delayed contact switches into off-position (yellow LED not illuminated). The instantaneous contact remains in on-position, until the control contact is opened again.

During the interval, the control contact (and the instantaneous contact) can be operated any number of times. A further cycle can only be started when the cycle run has been completed.

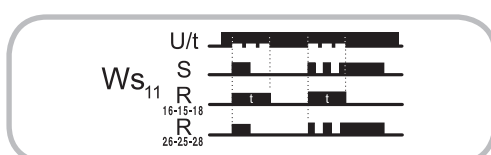


Single shot trailing edge with control contact (Wa11)

The supply voltage U must be constantly applied to the device (green LED illuminated).

When the control contact S is closed the instantaneous contact switches into on-position. When the control contact is opened, the instantaneous contact switches into off-position, the delayed contact switches into on-position (yellow LED illuminated) and the set interval t begins (green LED flashes). After the interval t has expired (green LED illuminated), the delayed contact switches into off-position (yellow LED not illuminated).

During the interval, the control contact (and the instantaneous contact) can be operated any number of times. A further cycle can only be started when the cycle run has been completed.

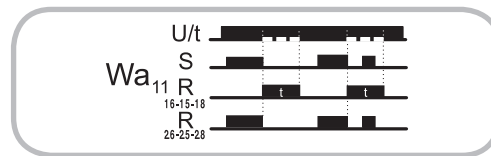


ON delay with control contact (Es11)

The supply voltage U must be constantly applied to the device (green LED illuminated).

When the control contact S is closed, the instantaneous contact switches into on-position and the set interval t begins (green LED flashes). After the interval t has expired (green LED illuminated) the delayed contact switches into on-position (yellow LED illuminated). This status remains until the control contact is opened again.


If the control contact is opened before the interval t has expired, the interval already expired is erased and is restarted with the next cycle.

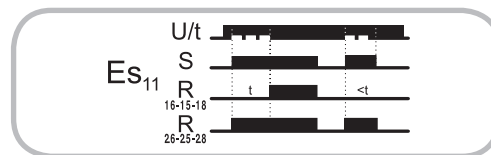

Single shot leading edge voltage controlled (Wu11)

When the supply voltage U is applied, both contacts switch into on-position (yellow LED illuminated) and the set interval t begins (green LED flashes). After the interval t has expired (green LED illuminated) the delayed contact switches into off-position (yellow LED not illuminated). This status remains until the supply voltage is interrupted.


If the supply voltage is interrupted before the interval t has expired, the both contacts switch into off-position. The interval already expired is erased and is restarted when the supply voltage is next applied.

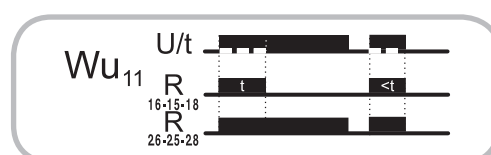

Functions


Flasher pause first (Bp11)

When the supply voltage U is applied, the instantaneous contact switches into on-position and the set interval t begins (green LED flashes). After the interval t has expired, the delayed contact switches into on-position (yellow LED illuminated) and the set interval t begins again. After the interval t has expired, the delayed contact switches into off-position (yellow LED not illuminated). The delayed contact is triggered at a ratio of 1:1 until the supply voltage is interrupted.

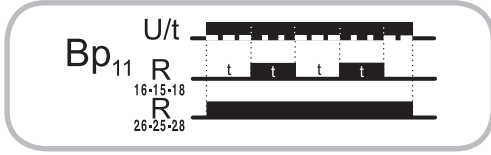


Pulse detection (Wt11)

When the supply voltage U is applied (green LED illuminated), the delayed contact switches into on-position (yellow LED illuminated). When the control contact S is closed, the set interval t begins (green LED flashes). So that the delayed contact remains in on-position, the control contact must be opened and closed again within the set interval t . If this does not happen, the delayed contact switches into off-position, the instantaneous contact switches into on-position and all further pulses at the control contact are ignored. To restart the function the supply voltage must be interrupted and re-applied.

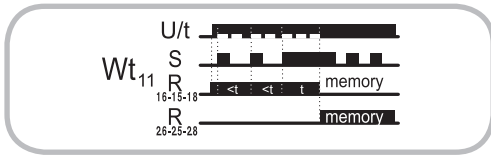


ON delay (E20)

When the supply voltage U is applied, the set interval t begins (green LED flashes). After the interval t has expired (green LED illuminated) the output relay R switches into on-position (yellow LED illuminated). This status remains until the supply voltage is interrupted. If the supply voltage is interrupted before the expiry of the interval t , the interval already expired is erased and is restarted when the supply voltage is next applied.

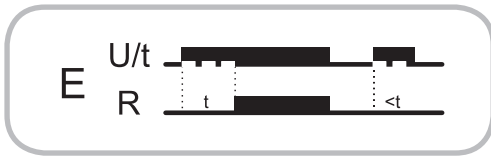


OFF delay with control contact (R20)

The supply voltage U must be constantly applied to the device (green LED illuminated). When the control contact S is closed, the output relay R switches into on-position (yellow LED illuminated). If the control contact is opened, the set interval t begins (green LED flashes). After the interval t has expired (green LED illuminated) the output relay switches into off-position (yellow LED not illuminated). If the control contact is closed again before the interval t has expired, the interval already expired is erased and is restarted with the next cycle.

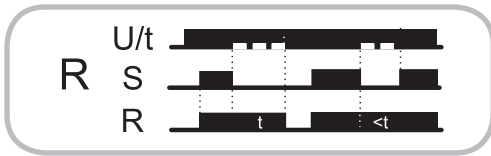


Single shot leading edge with control contact (Ws20)

The supply voltage U must be constantly applied to the device (green LED illuminated). When the control contact S is closed, the output relay R switches into on-position (yellow LED illuminated) and the set interval t begins (green LED flashes). After the interval t has expired (green LED illuminated) the output relay switches into off-position (yellow LED not illuminated). During the interval, the control contact can be operated any number of times. A further cycle can only be started when the cycle run has been completed.

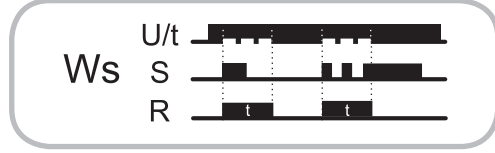


Single shot trailing edge with control contact (Wa20)

The supply voltage U must be constantly applied to the device (green LED illuminated). Closing the control contact S has no influence on the condition of the output relay R . When the control contact is opened, the output relay switches into on-position (yellow LED illuminated) and the set interval t begins (green LED flashes). After the interval t has expired (green LED illuminated), the output relay switches into off-position (yellow LED not illuminated). During the interval, the control contact can be operated any number of times. A further cycle can only be started when the cycle run has been completed.

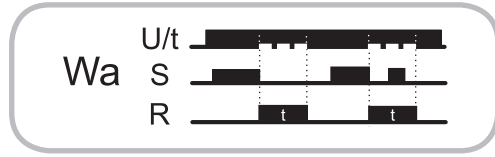


ON delay with control contact (Es20)

The supply voltage U must be constantly applied to the device (green LED illuminated). When the control contact S is closed, the set interval t begins (green LED flashes). After the interval t has expired (green LED illuminated) the output relay R switches into on-position (yellow LED illuminated). This status remains until the control contact is opened again. If the control contact is opened before the interval t has expired, the interval already expired is erased and is restarted with the next cycle.

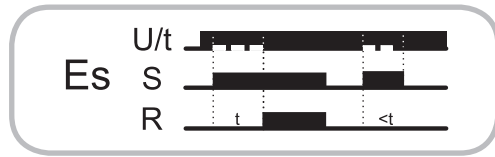

Single shot leading edge voltage controlled (Wu20)

When the supply voltage U is applied, the output relay R switches into on-position (yellow LED illuminated) and the set interval t begins (green LED flashes). After the interval t has expired (green LED illuminated) the output relay switches into off-position (yellow LED not illuminated). This status remains until the supply voltage is interrupted. If the supply voltage is interrupted before the interval t has expired, the output relay switches into off-position. The interval already expired is erased and is restarted when the supply voltage is next applied.

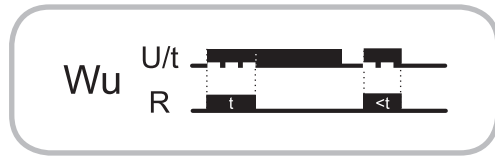


Functions

Flasher pause first (Bp20)

When the supply voltage U is applied, the set interval t begins (green LED flashes). After the interval t has expired, the output relay R switches into on-position (yellow LED illuminated) and the set interval t begins again. After the interval t has expired, the output relay switches into off-position (yellow LED not illuminated).


The output relay is triggered at a ratio of 1:1 until the supply voltage is interrupted.

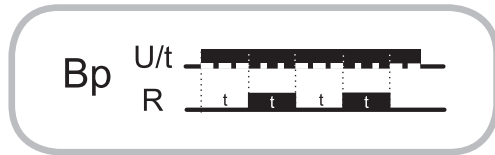

Pulse detection (Wt20)

When the supply voltage U is applied (green LED illuminated), the output relay R switches into on-position (yellow LED illuminated). When the control contact S is closed, the set interval t begins (green LED flashes). So that the output relay remains in on-position, the control contact must be opened and closed again within the set interval t . If this does not happen, the output relay switches into off-position and all further pulses at the control contact are ignored.

To restart the function the supply voltage must be interrupted and re-applied.

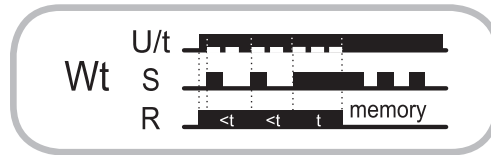

Connections

