


HAKEL GAS DISCHARGE TUBES - SALIENT FEATURES

- * Stable breakdown voltage
- * High insulation resistance; enables the use in high temperature and humidity
- * Small capacitance; minimises transmission loss and noise even with high frequency range
- * High durability against surges and fast restorability
- * Long life
- * Free of radioactive substance
- * Inexpensive for superior performance
- * High mechanical strength prevents leak and breakdown from strong shock
- * Various types available

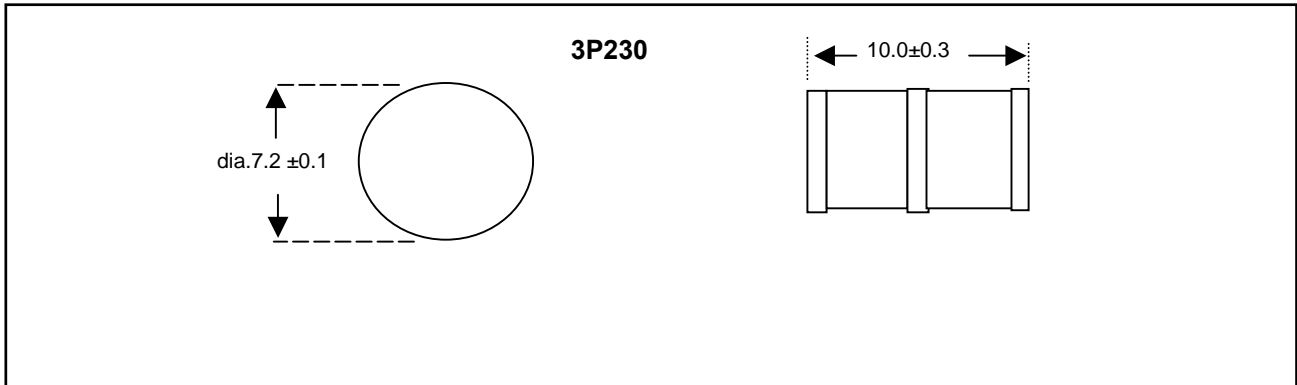

Type 3 TERMINAL CERAMIC TYPE GD TUBE - 3P230			
Sl. No.	Description	Test Condition	Specification
ELECTRICAL CHARACTERISTICS, Test Methods as per ITU-T (CCITT) K.12			
1	D.C Spark-Over Voltage	100V/Sec	230 ±20%
2	Impulse Spark-Over Voltage	100V/μsec	<500V
3	Impulse Spark-Over Voltage	1000V/μsec	<650V
4	Impulse Transverse Delay	1000 V/μ sec	< 75ns
5	Insulation Resistance	100V	>10 ¹⁰ Ohm
6	Glow Voltage	10 mA	< 70 V
7	Arc Voltage	2 A	< 10 V
8	Capacitance	1 M Hz	< 1.5 pF
9	DC Holdover Voltage	135 V	< 150 ms
10	Impulse Discharge Current	10000 A, 8/20μsec	10 Operations
		200 A, 10/700μsec	500 Operations
		200 A, 10/1000μsec	300 Operations
11	Alternating Discharge Current	10 A r.m.s, 1 sec	10 Operations

NOTES:

1. All dimensions are in mm
2. Electrodes are nickel plated where as all lead terminals are Tin plated.
3. Marking on the GD Tube
 - 3P230
 - 3 : 3 Terminal GD Tube
 - P : Dimension
 - 230 : 230 Volts
 - HAKEL : Manufacturer
 - MM : Month of manufacture
 - YY : Year of manufacture
4. The above model is also available with fail safe mechanism which is named as 3P230F
5. Blister Packing