

- Plug-in housing
- Width 38mm
- 8 functions
- 8 time ranges
- Zoom voltage
- 2 change over contacts



## Technical data

### 1. Functions

E	ON delay
R	OFF delay with control contact
Ws	Single shot leading edge with control contact
Wa	Single shot trailing edge with control contact
Es	ON delay with control contact
Wu	Single shot leading edge voltage controlled
Bp	Flasher pause first
Wt	Pulse detection

### 2. Time ranges

Time range	Adjustment range
1s	50ms 1s
10s	500ms 10s
1min	3s 1min
10min	30s 10min
1h	3min 1h
10h	30min 10h
1d	72min 1d
10d	12h 10d

### 3. Indicators

Green LED ON:	indication of supply voltage
Green LED flashes:	indication of time period
Yellow LED ON/OFF:	indication of relay output

### 4. Mechanical design

Self-extinguishing plastic housing, IP rating IP40  
 Mounted on screw terminal socket 11 poles  
 according to IEC 67-1-18a (Type R11X or ES12)  
 Mounting position: any

### 5. Input circuit

Supply voltage:	12 to 240V AC/DC	pins S2(+)-S10
Tolerance:		±10%
Rated frequency:		48 to 63Hz
Rated consumption:		
12 to 24V AC/DC	0.6VA (0.5W)	
110V AC	2VA (0.7W)	
230V AC	3VA (1.5W)	
Duration of operation:	100%	
Reset time:	100ms	
Residual ripple for DC:	10%	
Drop-out voltage:	>30% of the supply voltage	

### 6. Output circuit

2 potential free change over contacts  
 Switching capacity (distance < 5mm): 1250VA (5A / 250V AC)  
 Switching capacity (distance > 5mm): 2000VA (8A / 250V AC)  
 Fusing: 8A fast acting  
 Mechanical life: 2 x 10<sup>6</sup> operations  
 Electrical life: 2 x 10<sup>5</sup> operations  
 at 1000VA resistive load  
 max. 60/min at 100VA resistive load  
 max. 6/min at 1000VA resistive load  
 (according to IEC 947-5-1)

Insulation voltage: 250V AC (according to IEC 664-1)  
 Surge voltage: 4kV, overvoltage category III  
 (according to IEC 664-1)

### 7. Control contact

Connections:	not potential free, pins S2-S5
Loadable:	yes, parallel load min.1VA (0.5W) pins S5-S10
Line length:	max. 10m
Control pulse length:	DC min. 50ms AC min. 50ms


### 8. Accuracy

Base accuracy:	±1% (of maximum scale value)
Adjustment accuracy:	≤5% (of maximum scale value)
Repetition accuracy:	<0.5% or ±5ms
Voltage influence:	-
Temperature influence:	≤0.01% / °C

### 9. Ambient conditions

Ambient temperature:	-25 to +55°C (according to IEC 68-1)
Storage temperature:	-25 to +70°C
Transport temperature:	-25 to +70°C
Relative humidity:	15% to 85% (according to IEC 721-3-3 class 3K3)
Pollution degree:	3 (according to IEC 664-1)

### 10. Dimensions

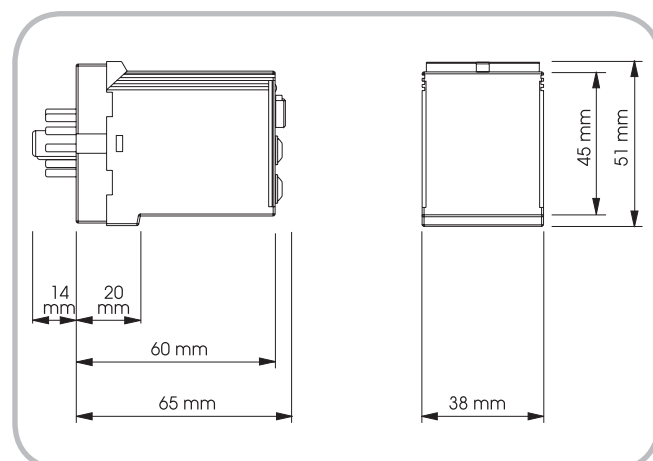


## Functions

### ON delay (E)

When the supply voltage U is applied, the set interval t begins (green LED flashes). After the interval t has expired (green LED illuminated) the output relay R switches into on-position (yellow LED illuminated). This status remains until the supply voltage is interrupted.

If the supply voltage is interrupted before the expiry of the interval t, the interval already expired is erased and is restarted when the supply voltage is next applied.

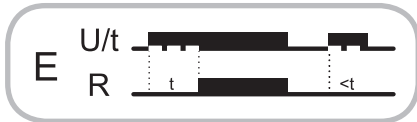


### OFF delay with control contact (R)

The supply voltage U must be constantly applied to the device (green LED illuminated).

When the control contact S is closed, the output relay R switches into on-position (yellow LED illuminated). If the control contact is opened, the set interval t begins (green LED flashes). After the interval t has expired (green LED illuminated) the output relay switches into off-position (yellow LED not illuminated).

If the control contact is closed again before the interval t has expired, the interval already expired is erased and is restarted with the next cycle.

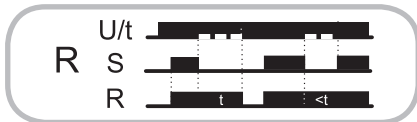


### Single shot leading edge with control contact (Ws)

The supply voltage U must be constantly applied to the device (green LED illuminated).

When the control contact S is closed, the output relay R switches into on-position (yellow LED illuminated) and the set interval t begins (green LED flashes). After the interval t has expired (green LED illuminated) the output relay switches into off-position (yellow LED not illuminated).

During the interval, the control contact can be operated any number of times.

A further cycle can only be started when the cycle run has been completed.

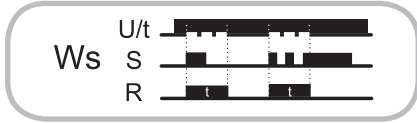


### Single shot trailing edge with control contact (Wa)

The supply voltage U must be constantly applied to the device (green LED illuminated).

Closing the control contact S has no influence on the condition of the output relay R. When the control contact is opened, the output relay switches into on-position (yellow LED illuminated) and the set interval t begins (green LED flashes). After the interval t has expired (green LED illuminated), the output relay switches into off-position (yellow LED not illuminated).

During the interval, the control contact can be operated any number of times.

A further cycle can only be started when the cycle run has been completed.

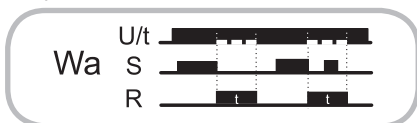

### ON delay with control contact (Es)

The supply voltage U must be constantly applied to the device (green LED illuminated).

When the control contact S is closed, the set interval t begins (green LED flashes). After the interval t has expired (green LED illuminated) the output relay R switches into on-position (yellow LED illuminated). This status remains until the control contact is opened again.

If the control contact is opened before the interval t has expired, the interval already expired is erased and is restarted with the next cycle.



### Single shot leading edge voltage controlled (Wu)

When the supply voltage U is applied, the output relay R switches into on-position (yellow LED illuminated) and the set interval t begins (green LED flashes). After the interval t has expired (green LED illuminated) the output relay switches into off-position (yellow LED not illuminated). This status remains until the supply voltage is interrupted.


If the supply voltage is interrupted before the interval t has expired, the output relay switches into off-position. The interval already expired is erased and is restarted when the supply voltage is next applied.



### Flasher pause first (Bp)

When the supply voltage U is applied, the set interval t begins (green LED flashes). After the interval t has expired, the output relay R switches into on-position (yellow LED illuminated) and the set interval t begins again. After the interval t has expired, the output relay switches into off-position (yellow LED not illuminated).


The output relay is triggered at a ratio of 1:1 until the supply voltage is interrupted.

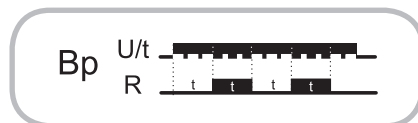

### Pulse detection (Wt)

When the supply voltage U is applied (green LED illuminated), the output relay R switches into on-position (yellow LED illuminated). When the control contact S is closed, the set interval t begins (green LED flashes). So that the output relay remains in on-position, the control contact must be opened and closed again within the set interval t. If this does not happen, the output relay switches into off-position and all further pulses at the control contact are ignored.

To restart the function the supply voltage must be interrupted and re-applied.

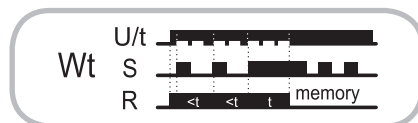

## Connections

