


- ▶ DIN-Rail mounting
- ▶ Width 35mm
- ▶ Without zero reset
- ▶ Without terminal cover

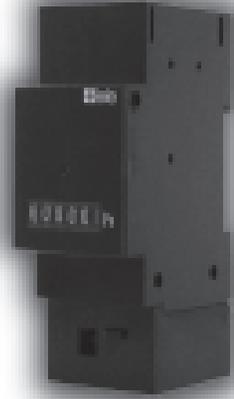

▶ Technical data

▶ 1. Indicators

Counter capacity:	99 999h
Accuracy of reading:	0.1h
Numeral colour:	white, decimal figures red
Numeral height:	4.4mm
Operation indicator:	flashing LED

▶ 2. Mechanical design

Self-extinguishing plastic housing, IP rating IP50
Class of protection III (up to 48V DC)
Mounted on DIN-Rail TS 35 according to EN 50022
Shockproof terminal connection according to VBG 4,
IP rating IP20
Initial torque: max. 4Nm
Terminal capacity:
1 x 1.5 to 10mm² without multicore cable end
2 x 0.8 to 2.5mm² without multicore cable end
1 x 1.0 to 6mm² flexible with multicore cable end
2 x 0.8 to 2.5mm² flexible with multicore cable end

▶ 3. Input circuit


Supply voltage:	12 to 48V DC
Tolerance:	±10%
Rated consumption:	12V DC approx. 20mW

▶ 4. Ambient temperature

Ambient temperature:	-10 to +50°C
Storage temperature:	-10 to +50°C
Transport temperature:	-10 to +50°C
Relative humidity:	<90%

▶ 5. Accessories

KA-TBX70.29: sealable terminal cover

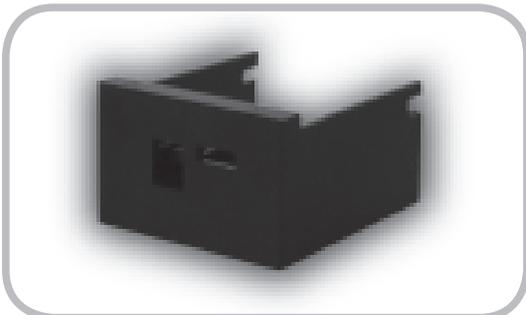

Abmessungen

